

180 Multi-Seal[®]

INSULATION ANCHOR PIN SYSTEM ADHESIVE



**No brushes! No messy spills!
No time consuming cleanups!
Adheres 200 pins per cartridge!**

- Use for rigid, fibrous and semi-grid board insulation, masonry walls, ducts and metal buildings
- Works with either nylon or metal based pins
- Immediate grab and high bond strength
- Insulation can be hung in 24 hours. Check on anchor pin before hanging insulation to be sure it is secure. Cure times vary with humidity.
- Adheres to painted and galvanized surfaces
- Performs in temperatures from -40°F to 325°F
- Excellent thermal shock resistance
- Water resistant
- Low odor, VOC compliant
- Qualifies for LEED credits



Call The **BOSS[®]** 800-928-BOSS

Soudal Accumetric

350 Ring Road • Elizabethtown • KY 42701


(270) 769-3385 • 800-928-BOSS • Fax: (270) 765-2412

www.bossproducts.com

BOSS® Insulation Anchor Pin System Adhesive



Remove the anchor pin support board from the carton and unfold.

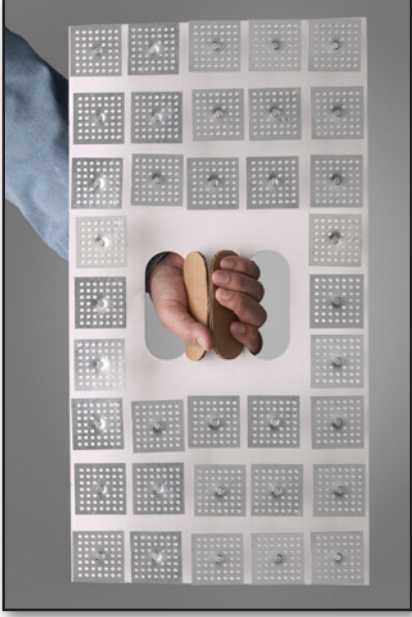


Insert the anchors into the support board at least 1/2" until secure. The board is designed for 5 pins per row, 6 pins per column



Place the support board on a stable surface. Cut the tip of the Multi-Seal® 180 nozzle. Insert the cartridge into a caulk gun.



Apply a 5/8" diameter "kiss" to the center of each anchor pin base. Each cartridge should have enough adhesive for ~200 pins.

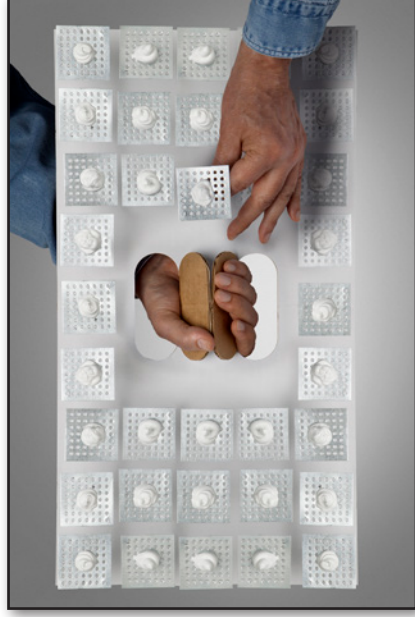

Carefully grab the handle of the support board. Remove anchor pins one at a time and stick in place.



Check an anchor pin the next day to ensure it is secure. Cure times may vary due to humidity. When secure, hang the insulation.

