

# Dynatex®

# GTX SEAM SEALER

Dynatex GTX Seam Sealer Trailer is an Ultra Synthetic Polymer, designed to resist all the on-the-road flexing and vibration. It cures quickly and provides permanent adhesion with excellent elasticity. It is specially formulated to offer outstanding primerless adhesion to all basic substrates found in the transportation market, such as steel, aluminum, glass, vinyl, and wood. It can be applied and tooled in almost all weather conditions.

- Perfect for Sealing Seams, Joints, Tears, and Holes
- 30-minute Skin Time
- VOC Compliant
- Free from Solvents and Isocyanates
- Non-streaking or Staining
- Fast Cure
- Paintable



## AVAILABLE IN:

### 300 mL Cartridge


- 49390 - Black (12/case)
- 49391 - White (12/case)
- 49392 - Grey (12/case)

## SUGGESTED APPLICATIONS:



Run 3/16" bead of GTX Seam Sealer

Run 3/16" bead of GTX Seam Sealer

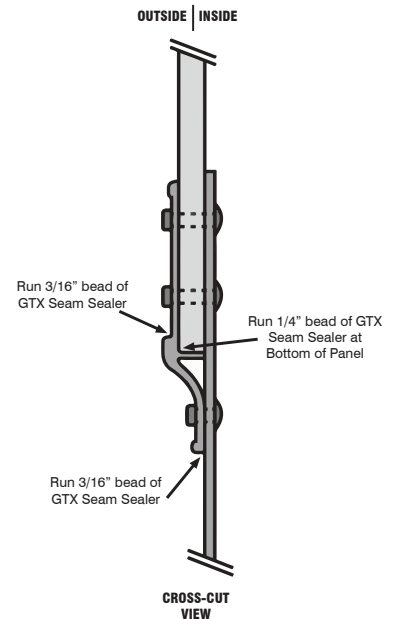

Run 3/16" bead of GTX Seam Sealer

Run 1/4" bead of GTX Seam Sealer at Bottom of Panel

Run 3/16" bead of GTX Seam Sealer

CROSS-CUT VIEW

- Tractor Trailers
- RVs
- Buses
- Van Conversions
- Shipping Containers

\*\*NOT RECOMMENDED FOR USE AS A GLAZING SEALANT

# Dynatex®

## GTX SEAM SEALER

### ULTRA SYNTHETIC POLYMER SEALANT

#### TYPICAL PROPERTIES

##### *UNCURED*

Flow Sag or Slump.....	NIL
Tack Free Time.....	20 min.
Extrusion Rate .....	400 g/min.

##### *CURED-PHYSICAL*

Durometer, Shore A Hardness .....	35 pts.
Specific Gravity.....	1.53
Tensile Strength .....	180 psi
Elongation.....	350%
Modulus .....	130 psi
Shrinkage .....	NIL

Service Temperature: -40°F to 200°F  
Application Temperature: -35°F to 140°F

\*\*Information on this sheet is subject to change without notice, and should not be used for writing specifications. For additional information, contact Dynatex.

**Dynatex®** A DIVISION OF **SODAL**

350 Ring Road•Elizabethtown, KY•42701  
Phone: (800)888-2937  
Fax: (270)769-6418  
Email: sales@dynatexinc.com  
www.dynatexinc.com