


# Dynatex®

## THREADLOCKER PRIMER



**Dynatex Threadlocker Primer** is a flammable but ozone friendly version, which replaces the original trichloroethane based product. Threadlocker Primer speeds cure of all anaerobic fluids and assists in speeding fixture times and reducing ultimate cure times. Used with all Dynatex anaerobic products but is not recommended for our Gasket Makers. Threadlocker Primer has an on-part life of 30 days. Product is normally hand applied from the bottle by brushing, wiping or spraying onto parts.

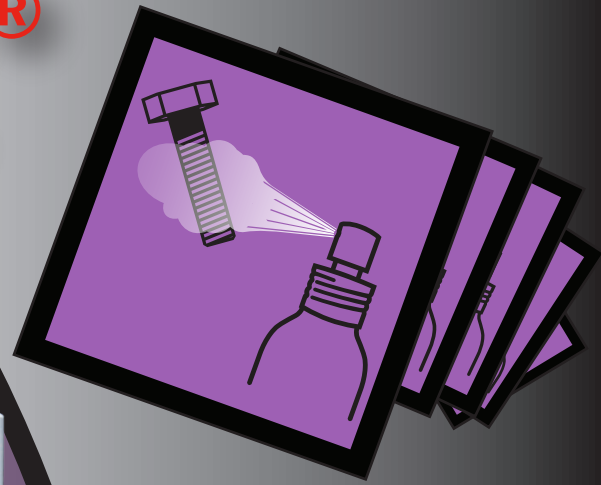

- **Activator for Inactive Metals**
- **Increases Breakaway Torque**
- **Decreases Set Up Time**
- **Allows Cold Weather Usage**

Dynatex Threadlocker Primer can be used by applying the primer to one or both bonding surfaces by spray, wipe or brush. Threadlocker Primer can be used for batch dipping of large quantities of parts while it also degreases and cleans your parts.

DESCRIPTION	CASE QTY	Part # 146825
Threadlocker Primer 4 Oz. Pump Bottle	10	Item # 49674

# Dynatex®

## THREADLOCKER PRIMER

### Technical Features

Chemical Base.....Heptane/Actetone  
Color:.....Green  
Viscosity.....3cps  
Shelf Life.....12 months @68°F unopened  
Flammability.....Yes, High

### **CURED PERFORMANCE**

Performace is dependent on the anaerobic viscosity, gap fill and type of materials being bonded. However, in typical applications fixture times are achieved in approximately 2 minutes.

***Dynatex Threadlocker Primer is a blend of flammable solvents. Care must be taken to avoid flames.***