

### DUAL-SIDED ABRASIVE WIPES PART NO. 143559

#### PHYSICAL PROPERTIES

Physical State .....	Cloth towelette
Odor .....	Mild
Specific Gravity .....	1.04
Appearance .....	Cloth towelette impregnated With a translucent, fluorescent liquid
Flash Point.....	120°F (49°C)
FP Method .....	PMCC
pH.....	6.80 ± 0.70

#### DESCRIPTION


**Dynatex® Dual-Sided Abrasive Wipes** remove the toughest grease, tar, grime, ink, paints, sealants, adhesives and other difficult soils. Each pre-moistened wipe has a textured surface on one side that is ideal for cleaning heavy-duty soils from hands, tools and work areas. The wipes also have a smooth side for general purpose cleaning.

#### FEATURES

- Pre-moistened
- Textured weave for added scrubbing power
- No rinsing, no drying, no residue

Contains an advanced formula and special "Dual-Sided" towel that removes:

- Acrylic
- Enamel
- Epoxy
- Rubber cement
- Oils
- Silicone
- Grease
- Glues
- Inks
- Poly foam and much more.....

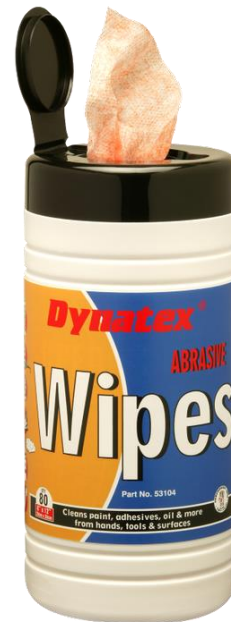

#### TYPICAL APPLICATIONS

- Automotive service departments
- Agriculture
- Field service trucks
- Industrial work stations
- Printing
- Manufacturing
- Plumbing
- Construction

They are ideal for use on most hard surfaces including:

- Painted walls
- Tools
- Work surfaces
- Signs
- Siding
- Bathroom partitions and more.....

#### Packaging

Colors: Cloth Towelette  
Size: 80 – 8 X 12 Wipes

---

## STORAGE AND SHELF LIFE

When stored in the original unopened containers at or below 90°F (32°C), **Dynatex® Dual-Sided Abrasive Wipes** has a shelf life of 12 months from date of shipment.

In Countries where high heat and humidity are a factor, special precautions must be taken. Store product in a covered, well-ventilated warehouse and avoid excessive heat conditions. Storage in high heat, high humidity conditions may reduce shelf life by up to 30%. Rotation of stock is an absolute necessity. Cartons should always be stacked upright. DO NOT stack cartons on their side. **NEVER** stack cartons more than 8 high. DO NOT store within 1 meter (4 feet) of roofline of the warehouse or storage building.

## USERS PLEASE READ

The information and data contained herein is believed to be accurate and reliable; however, it is the user's responsibility to determine suitability of use. Since the supplier cannot know all the uses, or the conditions of use to which these products may be exposed, no warranties concerning the fitness or suitability for a particular use or purpose are made.

It is the user's responsibility to thoroughly test any proposed use of our products and independently conclude satisfactory performance in the application.

Likewise, if the application, product specifications or manner in which our products are used requires government approval or clearance, it is the sole responsibility of the user to obtain sure authorization.

**Non-warranty:** Because the storage, handling and application of the material is beyond Dynatex control, we can accept no liability for the results obtained. Dynatex sole limited warranty is the product meets the manufacturing specifications in effect at time of shipment. There is no warranty of merchantability or fitness for use, nor any other express or implied warranty. Dynatex will not be liable for incidental or consequential damages of any kind. The exclusive remedy for breach of such limited warranty is a refund of purchase price or replacement of any product shown to be other than as warranted.

Suggestions of uses should not be taken as inducements to infringe any patents.

**Dynatex®** a division of **SOUDAL**